

UŞI AUTOMATE



Sistem de acționare inovator




- Sistemele automate de uși de la AlcoGroup deschid posibilități aproape nelimitate de configurare a ușilor. Design-ul ocupă primul loc pentru acest sistem.
- Unele dintre cele mai moderne, performante și sigure sisteme
- Soluțiile automate sunt atracția oricărei zone de acces.




• Cu ușile glisante automate de la GEZE se pot îndeplini cele mai diverse cerințe de utilitate pentru o clădire.



- Viteza de deschidere reglabila: pana la 0,8 m/sec/usa
- Viteza de inchidere reglabila: pana la 0,8 m/sec/usa
- Alimentare: 230V AC / 50 Hz, putere consumata: max. 300 VA
- Setarea timpului in care usa sta deschisa: reglabil, intre 0 si 60 secunde

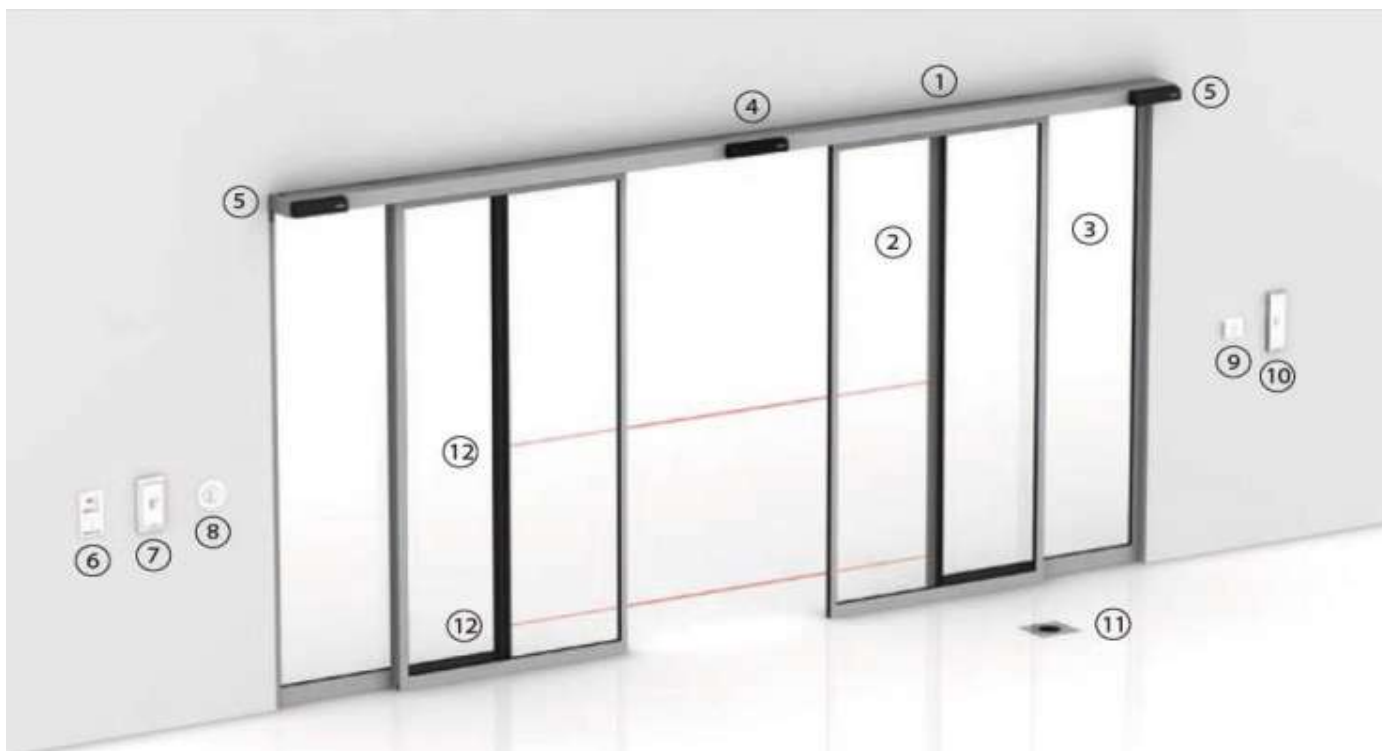

1. Acționare ușă glisantă
2. Foaia automată
3. Partea laterală
4. Detector
5. Lumină activă cu infraroșu
6. Comutator cu cheie
7. Întrerupător din plastic
8. Buton senzor LED din sticlă
9. Întrerupător de proximitate
10. Comutator
11. Comutator contact de picior
12. Bariere fotoelectrice

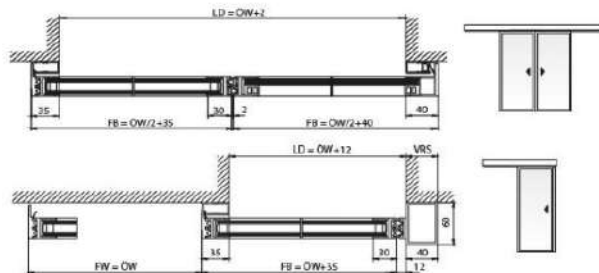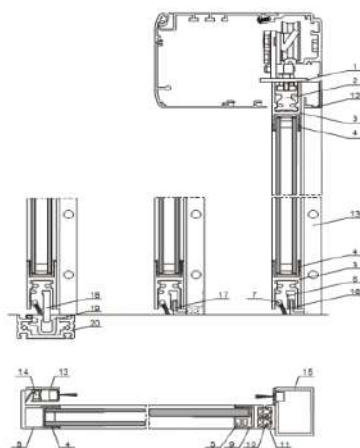

Note: Executam comenzi la nivel national si international. Preturile sunt orientative si nu contin tva. Durata medie de executie a unei lucrari este de 4-6 saptamani



Product features	ECdrive	ECdrive FR
For 1-leaf door systems	•	•
For 2-leaf door systems	•	•
Height	120 / 150 mm	
Depth	175 mm	
Leaf weight (max.) 1-leaf	120 kg	
Leaf weight (max.) 2-leaf	120 kg	
Opening width 1-leaf	700 – 3000 mm	
Opening width 2-leaf	900 – 3000 mm	
Temperature range	-15 – 50 °C	
IP rating	IP20	
Disconnection from mains	Main switch in the drive	
Opening speed (max.)	0.8 m/s	
Closing speed (max.)	0.8 m/s	
Hold-open time	0 – 60 S	
Adjustable opening and closing force (max.)	150 N	
Automatic adaptation to traffic flow	•	•
Automatic reversal when an obstacle is detected	•	•
Pharmacy opening	•	•
Interlocking door system function	•	-
Vestibule function	•	-
Automatic opening in the event of a power failure	adjustable	fitted as standard
Automatic closing in the event of a power failure	adjustable	not available
Function in the event of a power failure	adjustable for 30 min. / 30 cycles	open
Automatic opening in the event of a fault	not available	fitted as standard
Approvals	DIN 18650 BGR232 DIN EN ISO 13849: Performance Level D	DIN 18650 BGR232 DIN EN ISO 13849: Performance Level D AutSchR

• = YES

Note: Executam comenzi la nivel national si international. Preturile sunt orientative si nu contin tva. Durata medie de executie a unei lucrari este de 4-6 saptamani



Adresa: Str. Reînvierii, nr.3
Sector 2, București
Telefon: 0767.11.00.22
E-mail: office@alcogroup.ro
Web: alcogroup.ro

 **AlcoGroup**™
quality first